LIQUID LEVEL CONTROLS

Float Actuated

Series VFS Liquid Level Controls



- General purpose NEMA 1 rated liquid level controls for a variety of industrial and commercial applications such as boilers and tanks, high and low alarms and pumps
- Can be used in pairs to start and stop auxiliary equipment between any desired levels
- 1" NPT pipe connection
- ¾" NPT electrical outlet
- Available with snap action switches
- A float operated armature with magnetic switching senses the liquid level
- Switch mechanism is completely sealed from the liquid
- Optional features
 - 2 or 3 switches for actuation of multiple devices
- Manual reset
- Maximum ambient temperature

 Series VFS (snap action switch) 110°F (43°C)
- Maximum flooded chamber temperature 360°F (182°C)
- Maximum water temperature 406°F (208°C)
- Maximum pressure 250 psig (17.6 kg/cm²)

Electrical Ratings

| No. of | | Motor Switch R | | |
|------------|---------|----------------|--------------|----------------|
| switches | Voltage | Full Load | Locked Rotor | Pilot Duty |
| 1 or 2 | 120 VAC | 7.4 | 44.4 | |
| switches | 240 VAC | 3.7 | 22.2 | 360 VA at |
| 3 switches | 120 VAC | 1.8 | — | 120 or 240 VAC |
| | 240 VAC | .9 | | |
| Maximum | | | | |


Operating Level Adjustment

| Model Number | | |
|----------------|--------------------|-----------------------|
| Snap Switch | Reset Operation | Number of Switches |
| VFS-1A-V | Automatic | One |
| VFS-1M-V | Manual | (SPDT) |
| VFS-2A-V | Automatic | Two |
| VFS-2M-V | Manual | (SPDT,SPST) |
| VFS-3A-V | Automatic | Three |
| VFS-3M-V | Manual | (SPDT,SPST, SPDT) |

Dimensions, in. (mm)


| | , , | , | | | | | | |
|-----|----------|-----|---------|-----|---------|-----------|---------|-----------|
| Α | В | C | D | E | F | G | Н | J |
| NPT | | NPT | | NPT | | | | |
| 3⁄4 | 5½ (130) | 1 | 8 (203) | 1 | 1¾ (45) | 25⁄8 (67) | 4 (102) | 20¾ (527) |





Adjustable Operating Levels

Factory minimum setting shown in black, possible field adjustments shown in gray.

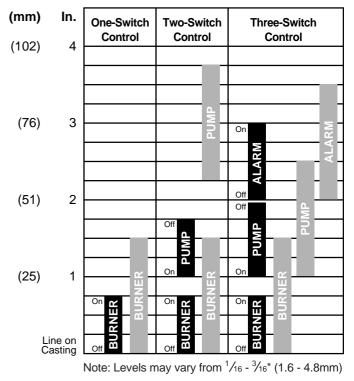

Ordering Information

| Model Number | Part Number | Description | Weight Ibs. (kg) |
|-----------------|----------------|---|---------------------|
| VFS-1A-V | 180250 | Liquid level control w/1 SPDT snap switch | 37.0 (16.8) |
| VFS-1M-V | 180240 | VFS-1A-V w/manual reset | 37.0 (16.8) |
| VFS-2A-V | 180290 | Liquid level control w/2 snap switches (1 SPDT & 1 SPST) | 37.0 (16.8) |
| VFS-2M-V | 180280 | VFS-2A-V w/manual reset | 37.0 (16.8) |
| VFS-3A-V | 180330 | Liquid level control w/3 snap switches (2 SPDT & 1 SPST) | 38.0 (17.2) |
| VFS-3M-V | 180320 | VFS-3A-V w/manual reset | 38.0 (17.2) |