


Float Actuated Switch – For Fuel Oil

Series E-8



Liquid Level Controls

- For industrial or commercial applications where measuring or regulating Grade 2 fuel oil levels (with a specific gravity of 0.85 or greater) in storage tanks is required
- Threads directly into 2 1/2" NPT tapping of tank side
- Single pole, double throw switch
- Maximum operating pressure 5 psi (.35 kg/cm²)
- Maximum water temperature 190°F (87°C)

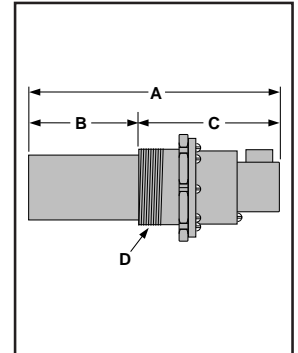

Electrical Ratings

Voltage	Motor Switch Rating (Amperes)		Pilot Duty
	Full Load	Locked Rotor	
120 VAC	7.4	44.4	125 VA at 120 or 240 VAC
240 VAC	3.7	22.2	

Dimensions, in. (mm)

A	B	C	D NPT
8 7/8 (225)	4 1/8 (105)	4 3/4 (121)	2 1/2

Ordering Information

Model Number	Part Number	Description	Weight lbs. (kg)
E-8	158300	Low water cut-off	3.7 (1.7)
E-8-J	158410	E-8 w/BSPT threads	3.7 (1.7)