

VK 4000 SERIES ORDERING INFORMATION


MODEL.	NOMINAL STEM LENGTH	CONTROL-RANGE °C	THERMOSTAT APPROX. DIFF.	FEATURES
VK 4251	7" / 178mm	10 - 88 °C	10 °C	
VK 4252	7" / 178mm	10 - 88 °C	10 °C	Pocket clip fitted
VK 4253	7" / 178mm	30 - 110 °C	10 °C	
VK 4354	7" / 178mm	30 - 110 °C	10 °C	Pocket clip fitted
VK 4351	11" / 280mm	40 - 88 °C	10 °C	
VK 4352	11" / 280mm	40 - 88 °C	6 °C	Pocket clip fitted
VK 4353	11" / 280mm	60 - 120 °C	6 °C	
VK 4354	11" / 280mm	60 - 120 °C	6 °C	Pocket clip fitted
VK 4355	11" / 280mm	0 - 40 °C	6 °C	
VK 4451	18" / 457mm	45 - 88 °C	5 °C	

VK 4000 SERIES TECHNICAL SPECIFICATION

IMMERSION HEATER THERMOSTAT	Voltage:	250v AC
Contacts: Single Pole	Load Current:	20 Amps Resistive
Function: Break on Temp rise	* Not recommended for currents below 0.5A AC.	

VK DIMENSIONS

Dimensions in mm

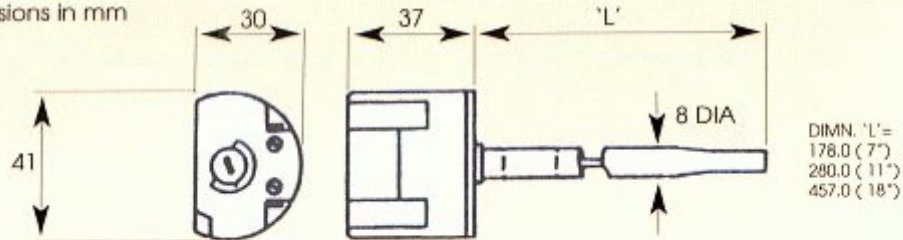

OPTIONS AND ACCESSORIES FOR VK SERIES

MODEL.	DESCRIPTION
8512601	7" / 178mm VK pocket 1/2" BSP taper
8522701	11" / 280mm VK pocket 1/2" BSP taper
8542801	18" / 457mm VK pocket 1/2" BSP taper
8361403	VK w/proof conv. kit with 13.5 PG cable gland
8361404	VK w/proof conv. kit with 3/4" conduit entry
8512651	7" / 178mm pocket for use with conv. kit 1/2" BSP taper
8522751	11" / 280mm pocket for use with conv. kit 1/2" BSP taper

2011-02-16 오후 2:35:54PI-VK4000Series.jpg